



PCT/2004 / 0 0 0 1 5 1



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

REC'D 24 FEB 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

W. Evans

Dated 11 February 2004

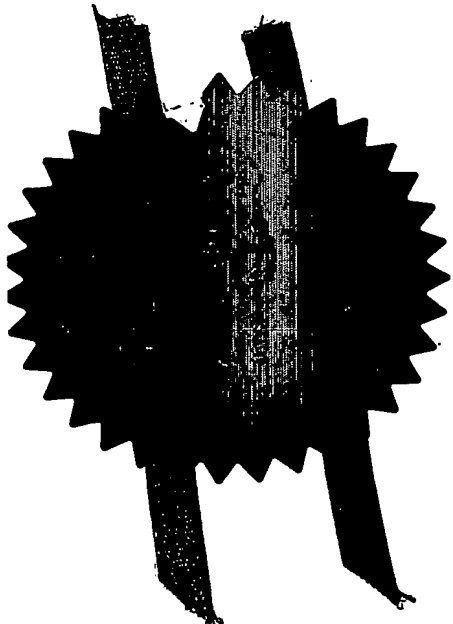

Patents Form 1/77

Patents Act 1977
(Rule 16)20JAN03 E778144-1 002748
P01/7700 0.00-0301164.0

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

The Patent Office

Cardiff Road
Newport
South Wales
NP18 8QQ

1. Your reference

~~20740~~ P0810

2. Patent application number

(The Patent Office will fill in this part)

0301164.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Ceramasppeed Limited
Zortech Avenue
Oldington
Kidderminster
Worcestershire DY11 7DY

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4428439002

4. Title of the invention

TEMPERATURE-RESPONSIVE DEVICE

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

DEREK JACKSON ASSOCIATES
The Old Yard, Lower Town
Claines
Worcester WR3 7RY

Patents ADP number (if you know it)

5600416002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body,

See note (d))

yes

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 16

Claim(s)

Abstract

Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 17 Jan 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Derek Jackson - Tel : 01905 755180

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

0058209 20-Jan-03 11:06

TEMPERATURE-RESPONSIVE DEVICE

This invention relates to a temperature-responsive device for an electric heater, in particular an electric heater
5 for use in a cooking appliance, such as a cooking hob having a glass-ceramic cooking surface. The invention also relates to an electric heater provided with the temperature-responsive device.

10 It is well known to provide a temperature-responsive device for controlling operation of an electric heater. Such an electric heater is typically arranged for location behind a surface to be heated, such as a glass-ceramic cooking surface, and generally comprises a dish-
15 like support having therein at least one electric heating element. In particular, the temperature-responsive device comprises an electrical component having an electrical parameter which changes as a function of temperature and which is supported by an elongate member
20 which is arranged to extend at least partly across the heater from a periphery thereof. The electrical component provides an electrical output which changes as a function of temperature, the electrical component being electrically connected to an electronic controller, such
25 as a microprocessor-based controller, to control energising of the electric heater from a power supply.

In particular, the electrical component comprises an electrical resistance temperature detector, such as a platinum resistance temperature detector, whose electrical resistance changes as a function of
5 temperature. The electrical component may be supported inside a tube, such as of metal or ceramic, or on an elongate beam, such as of ceramic material.

It is known to provide a terminal block externally on the
10 dish-like support of the heater. Such terminal block is remote from the temperature-responsive device and is connected inside the heater to terminal regions of the heating element or elements. External leads are arranged from the terminal block to the power supply, suitably by
15 way of the electronic controller.

It is also known to provide direct electrical connection between terminal regions of a heating element and connecting elements on a temperature-limiting device,
20 such connecting elements being accessible in the region of a front face of a switch housing of the temperature-limiting device adjacent to the heater. In this known arrangement, the temperature-limiting device comprises a differentially-expanding rod and tube assembly, which
25 extends at least partly across the heater from the

housing and operates one or more switch means located in the housing.

According to the present invention there is provided a
5 temperature-responsive device for an electric heater, the
heater being adapted for location behind a surface to be
heated and comprising a dish-like support having therein
at least one electric heating element having first and
second terminal regions, the device comprising an
10 electrical component having an electrical parameter which
changes as a function of temperature and arranged to be
supported inside the heater by an elongate member which
is adapted to be secured to the heater and to extend at
least partially across the heater from a region
15 externally of the periphery thereof, an electrically
insulating carrier member being secured to the elongate
member at a location externally of the periphery of the
heater, the carrier member having first and second side
edges laterally disposed at opposite sides of the
20 elongate member and provided with first and second
electrically conductive elements accessible at the
opposite side edges of the carrier member for electrical
connection to the first and second terminal regions
respectively of the at least one electric heating
25 element.

Electrical connection of the first and second electrically conductive elements to the respective first and second terminal regions of the at least one heating element may be by means of direct contact between the
5 electrically conductive elements and the terminal regions.

Alternatively, one or both of the first and second electrically conductive elements may be arranged for
10 electrical connection to the respective first and/or second terminal regions of the at least one heating element by way of at least one electrically conductive link, such as of wire or strip form.

15 The first and second terminal regions of the at least one heating element, or the at least one electrically conductive link, may extend through apertures in the dish-like support for electrical connection to the first and second electrically conductive elements.

20

The first and second terminal regions of the at least one heating element, or the at least one electrically conductive link, may be electrically connected to the first and second electrically conductive elements by
25 welding.

The first and second electrically conductive elements may extend laterally at the first and second opposite side edges of the carrier member.

- 5 At least one of the first and second electrically conductive elements may have a portion extending in a direction towards the heater and at a predetermined angle relative to a rim of the dish-like support.
- 10 At least one of the first and second electrically conductive elements may be provided with a strip-like portion or a flanged portion for securing to the first and/or second terminal regions of the at least one heating element, or to the at least one electrically
- 15 conductive link.

The strip-like portion or portions may have a plane thereof disposed in any desired orientation from a vertical plane to a horizontal plane.

20

The flanged portion may suitably have a wall portion with a dependant laterally-directed ledge portion.

- The at least one electric heating element may be of
- 25 corrugated ribbon form supported upstanding on edge in the dish-like support.

At least one of the first and second terminal regions of the at least one electric heating element of corrugated ribbon form may be connected directly to the first and/or second electrically conductive element or elements and
5 have an orientation substantially the same as that of the at least one electric heating element as supported in the dish-like support, or may be twisted through an appropriate angle for connection to the first and/or second electrically conductive element or elements.

10

The first and second electrically conductive elements may comprise metal, such as stainless steel or nickel-plated steel.

15 The first and second electrically conductive elements may be provided with means for electrical connection thereof to external lead wires. Such means for electrical connection may comprise terminal members, such as of tab or spade form.

20

The carrier member may comprise ceramic material.

The electrical component may be provided with electrical leads extending therefrom and emerging from the elongate
25 member at the region of the heater externally of the periphery thereof. Such electrical leads may be adapted

to be electrically connected to an electronic controller,
such as a microprocessor-based controller, which is
adapted to provided controlled electrical connection
between a power supply and the first and second
5 electrically conductive elements.

The electrical component may comprise a device whose
electrical resistance changes as a function of
temperature, and may comprise an electrical resistance
10 temperature detector, such as a platinum resistance
temperature detector.

The elongate member may comprise a tube, such as of metal
or ceramic, inside which the electrical component is
15 arranged.

Alternatively, the elongate member may comprise a beam,
such as of ceramic material, on a surface of which the
electrical component is provided.

20

The present invention also provides an electric heater
provided with the aforementioned temperature-responsive
device.

25 For a better understanding of the present invention and
to show more clearly how it may be carried into effect,

reference will now be made, by way of example, to the accompanying drawings in which:

Figure 1 is a plan view of an arrangement of part of an electric heater provided with an embodiment of a temperature-responsive device according to the present invention; and

Figure 2 is a plan view of a modification of the arrangement of Figure 1.

Referring to Figure 1, an electric heater 2 is arranged for location beneath a surface 4 to be heated. The surface 4 may be a cooking surface and may comprise glass-ceramic material.

The heater 2 comprises a dish-like support 6, such as of metal, containing a layer 8 of thermal and electrical insulation material, such as microporous thermal and electrical insulation material. A peripheral wall 10 of thermal insulation material is provided in the dish-like support 6 and contacts the underside of the surface 4 to be heated.

At least one radiant electric heating element 12 is arranged inside the dish-like support 6. As shown in

Figure 1, heating element 12 comprises a corrugated metal ribbon arranged upstanding on edge in the dish-like support 6. However, other forms of heating element could be provided..

5

A temperature-responsive device 14 is provided for the heater 2 and comprises an elongate member 16 which is suitably secured to the heater at the periphery thereof and extends from a region externally of the periphery of the heater, through an aperture in the rim of the dish-like support 6 and the peripheral wall 10, and at least partially across the heater. The elongate member 16 is arranged to overlies and be spaced from the at least one heating element 12.

15

The elongate member 16 supports an electrical component 18 having an electrical parameter which changes as a function of temperature and which is provided with electrically conducting leads 20 which extend therefrom and emerge from the elongate member 16 at an end 22 thereof which is located externally of the heater 2. The electrical component 18 suitably comprises a device whose electrical resistance changes as a function of temperature and may comprise an electrical resistance temperature detector, such as a platinum resistance temperature detector.

The elongate member 16 may comprise a tube, such as of metal or ceramic, inside which the electrical component 18 is arranged at one end 24 thereof, and with the leads 20 passing along the tube. Alternatively, the elongate member 16 may comprise a beam, such as of ceramic, on an upper surface of which the electrical component 18 is arranged at one end 24 thereof. In this case, the electrical component 18 and/or the portion of the leads 20 extending therefrom along the beam 16, may be of film form, deposited on the surface of the beam 16, although this is not essential.

The leads 20 from the electrical component 18 are arranged to be electrically connected to a microprocessor-based electronic controller 26, which is electrically connected to a power supply 28.

A carrier member 30 of electrically insulating material, such as ceramic, is secured to the elongate member 16 externally of the heater at the end 22 of the elongate member 16. The carrier member 30 is suitably of block form and is suitably provided with an aperture through which the elongate member 16 passes. The carrier member 30 may form an interference fit with the elongate member 16 or may be secured thereto by adhesive or other means.

The carrier member 30 has a first side edge 32 at which laterally extends a first electrically conductive element 34 having a portion 36 extending in a direction towards the heater at a predetermined angle relative to the rim
5 of the dish-like support 6.

The carrier member 30 has a second side edge 38 at which laterally extends a second electrically conductive element 40 having a portion 42 extending in a direction
10 towards the heater at a predetermined angle relative to the rim of the dish-like support 6.

The first electrically conductive element 34 is provided with a terminal member 44, such as of tab or spade form,
15 arranged for electrical connection to an external lead wire 46 provided from the power supply 28 by way of the controller 26. The second electrically conductive element 40 is likewise provided with a terminal member 48, such as of tab or spade form, arranged for electrical
20 connection to an external lead wire 50 provided from the power supply 28 by way of the controller 26.

The first and second electrically conductive elements 34, 40 are suitably secured to the carrier member 30 by means
25 35, 41, which may comprise rivets. Alternatively, other fastening means such as twist tabs, welding or discrete

fasteners such as drive screws of standard screws and nuts may be employed.

5 The first and second electrically conductive elements 34 and 40 are accessible at the side edges 32, 38 of the carrier member 30 and suitably comprise metal, such as stainless steel or nickel-plated steel. They are suitably of strip form.

10 The corrugated ribbon heating element 12 has first and second terminal regions 12A and 12B thereof extending through apertures 52, 54 in the peripheral wall 10 and the rim of the dish-like support 6, of the heater 2. If desired, the terminal regions 12A and 12B need not be
15 corrugated. The first terminal region 12A of the heating element 12 is welded directly to the portion 36 of the first electrically conductive element 34 and the second terminal region 12B of the heating element 12 is welded directly to the portion 42 of the second electrically
20 conductive element 40. The first and second electrically conductive elements 34, 40 are readily accessed at the side edges 32, 38 of the carrier member 30 by the jaws of a pincer welding apparatus (not shown), to effect the necessary welding operations.

The portions 36 and 42 of the first and second electrically conductive elements 34, 40 may comprise wall portions and have dependant outwardly-directed ledge portions 36A and 42A respectively, such that the first and second electrically conductive elements 34, 40 have a resultant flanged form. The ledge portions 36A and 42A serve to support the first and second terminal regions 12A, 12B of the heating element 12 during the welding operation and may each be provided with an upstanding lip (not shown) on the outer edge thereof to assist retention of the terminal regions 12A, 12B on the ledge portions 36A, 42A prior to welding. The lips may extend upwardly by about 2 mm and such that they do not inhibit access by the welding apparatus. Alternatively, other means (not shown) may be provided to retain the terminal regions 12A, 12B on the ledge portions 36A, 42A prior to welding.

The portions 36 and 42 of the first and second electrically conductive elements 34, 40 could be of simple strip form, having a plane thereof disposed in any desired orientation from a vertical plane to a horizontal plane.

When the heater 2 is energised for operation, heat is sensed by the electrical component 18 and its electrical parameter, such as electrical resistance, changes as a

function of temperature. The change in the electrical parameter is monitored by the controller 26, which operates in known manner to control energising of the at least one heating element 12 from the power supply 28, through the lead wires 46, 50, and provide a desired heating rate and/or temperature limit for the heater.

As shown in Figure 1, the first and second terminal regions 12A, 12B of the corrugated ribbon heating element 12 have an orientation substantially the same as that of the heating element 12 as supported in the dish-like support 6. If desired, however, the first and/or second terminal region or regions 12A, 12B of the heating element 12 may be twisted through an appropriate angle for connection to the first and/or second electrically conductive elements 34, 40 in a different plane. This is illustrated in Figure 2, where the first terminal region 12A of the heating element 12 is twisted and welded to the outwardly-directed ledge portion 36A of the portion 36 of the first electrically conductive element 34. The second terminal region 12B of the heating element 12 can be similarly arranged.

Instead of the first and second terminal regions 12A, 12B of the heating element 12 being directly welded to the first and second electrically conductive elements 34, 40,

one or more intermediate electrically conductive links, such as of wire or strip form, may be provided connecting the first and/or second terminal regions 12A, 12B of the heating element 12 to the first and/or second

5 electrically conductive elements 34, 40 respectively.

This is illustrated in Figure 2, where the second terminal region 12B of the heating element 12 is welded to one end of a link 56 inside the heater 2. The link 56 passes through aperture 54 in the peripheral wall 10 and the rim of the dish-like support 6 of the heater 2 and is welded at its opposite end to the portion 42, or the portion 42A, of the second electrically conductive element 40. The first terminal region 12A of the heating element 12 can be similarly treated.

15

The provision of one or more electrically conductive links, such as the link 56, is particularly advantageous when a heating element of lamp form is provided instead of the ribbon heating element 12 and where terminals on an envelope of the lamp cannot be connected directly to the first and second electrically conductive elements 34, 40.

Although specific reference has been made to an electrical component 18 in the form of an electrical resistance temperature detector, such as a platinum

resistance temperature detector, the electrical component
18 could comprise any other suitable device having an
electrical parameter which changes as a function of
temperature. For example, the component 18 could
5 comprise a thermistor or a thermocouple, or a device
whose electrical capacitance or inductance appropriately
changes as a function of temperature.

It is to be noted that no electrical connections are
10 provided, on the temperature responsive device 14,
between the first and second electrically conductive
elements 34, 40 on the carrier means 30 and the
electrical component 18 supported by the elongate member
16.

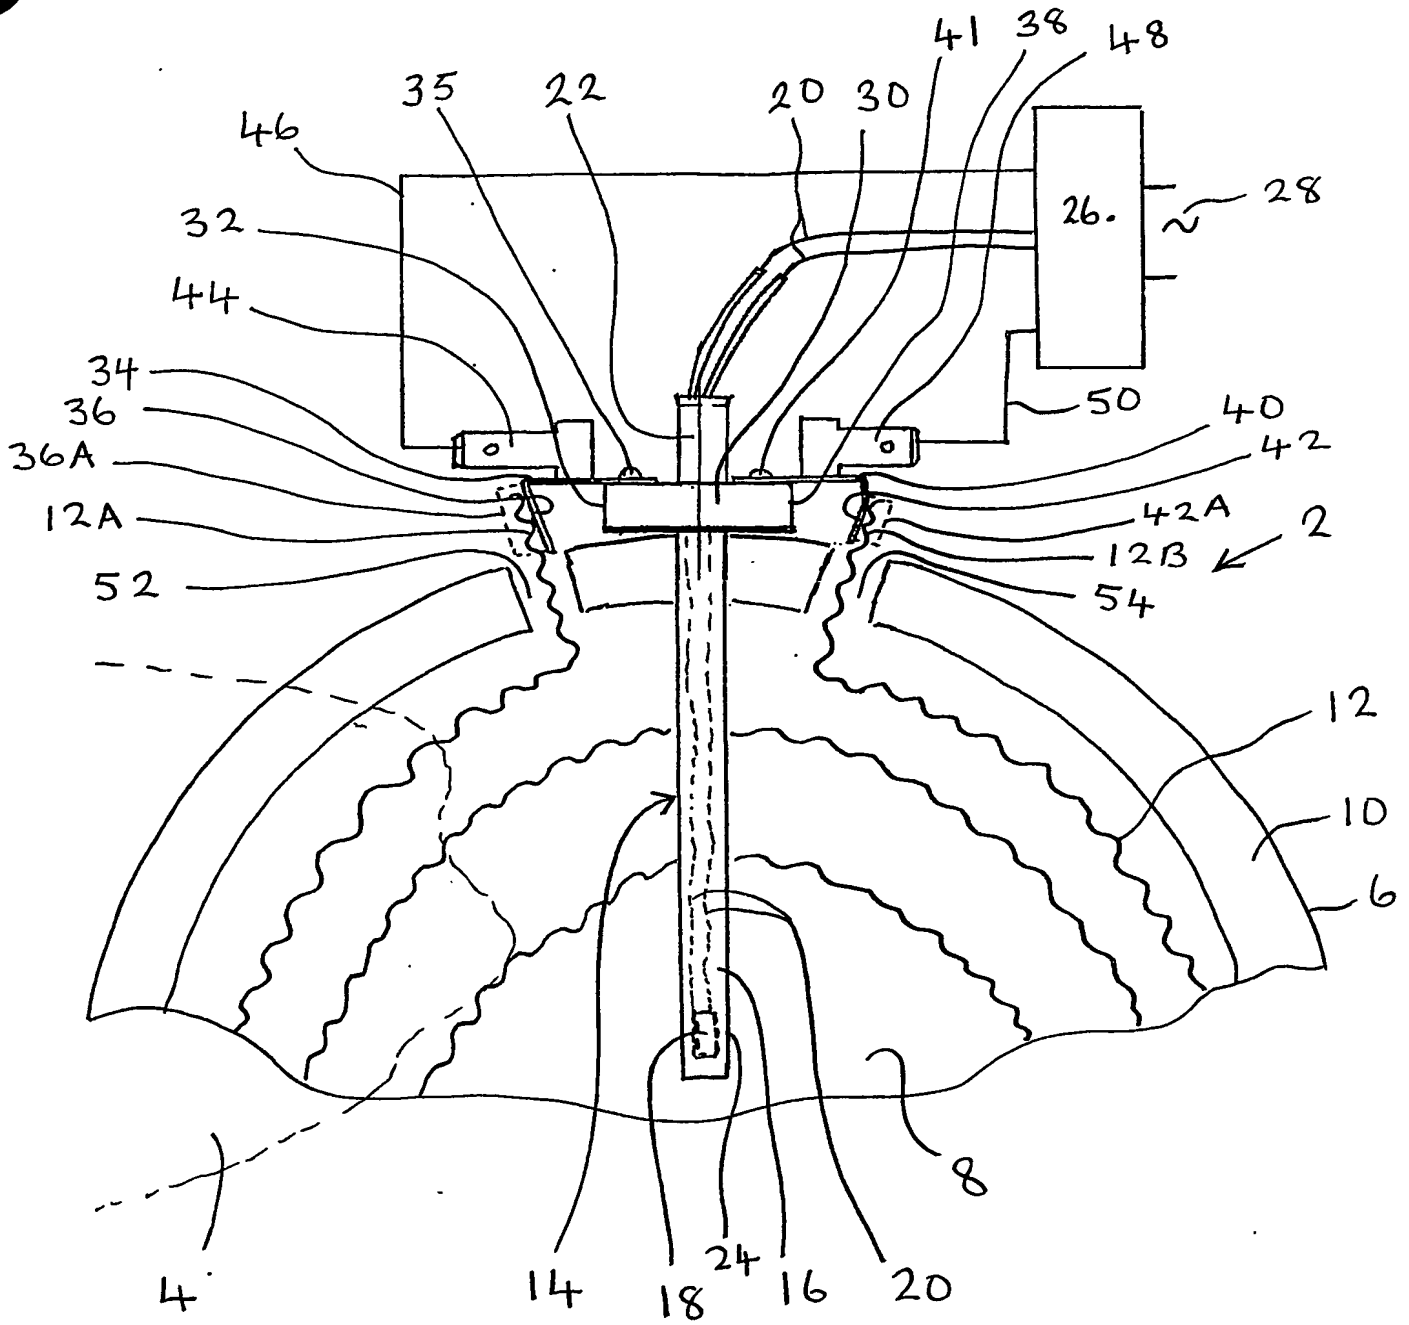


FIG. 1

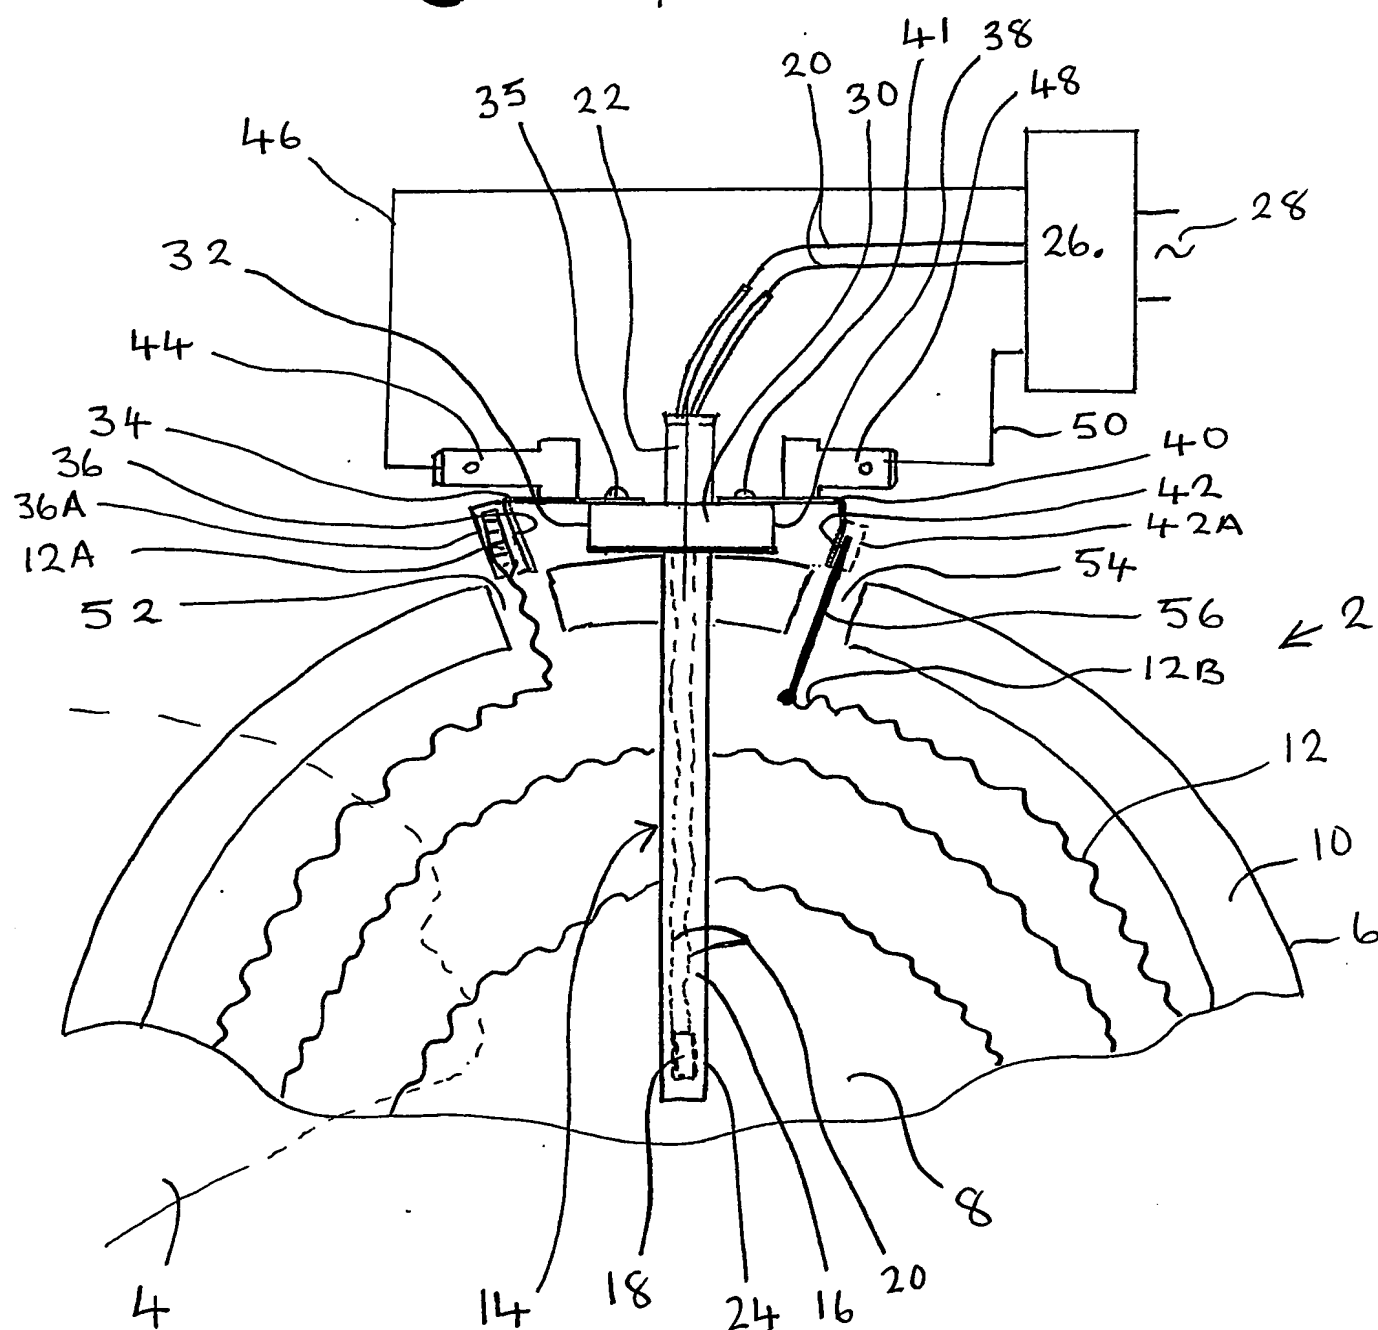


FIG. 2

THE PATENT OFFICE
12 FEB 2004
Received in Patents
International Unit

PCT Application
PCT/GB2004/000151

